


Corrugated cable

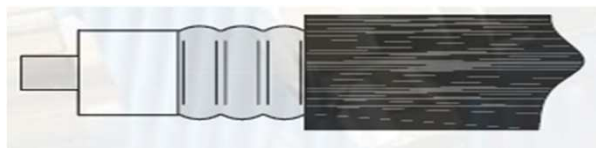

CF 1/4" Cu2Y						GROUP	CODE	
						100 Z	CAB-100 Z-50	
Ω	CENTER COND		DIELECTRIC		SCREEN		JACKET	
	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$
50 $\pm$ 1.5	Al+Cu	2,4	PE exp	6	Cu	7,5	PE	10
MHZ	30	450	894	960	1000	1500	2000	4000
dB/100m	2,4	10,3	14,1	14,5	14,7	19,7	22,1	32
Watts	2900	800	500	470	410	320	290	230

CF 3/8" Cu2Y						GROUP	CODE	
						121 Z	CAB-121 Z-50	
Ω	CENTER COND		DIELECTRIC		SCREEN		JACKET	
	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$
50 $\pm$ 1	Al+Cu	3	PE exp	8,3	Cu	9,5	PE	12,1
MHZ	30	450	894	960	1000	1500	2000	4000
dB/100m	1,5	6,1	8,5	9,1	9,4	11,3	13,4	19,4
Watts	4500	1100	730	700	650	580	500	340

CF-1/2" Cu2Y						GROUP	CODE	
						160 Z	CAB-160 Z-50	
Ω	CENTER COND		DIELECTRIC		SCREEN		JACKET	
	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$
50 $\pm$ 0.5	Al+Cu	4,8	PE exp	12,95	Cu	13,84	PE	15,88
MHZ	30	450	894	960	1000	1500	2000	4000
dB/100m	1,21	4,96	7,22	7,51	7,68	9,61	11,3	17
Watts	6310	1530	1050	1010	994	793	673	448

CF-7/8" Cu2Y						GROUP	CODE	
						280 Z	CAB-280 Z-50	
Ω	CENTER COND		DIELECTRIC		SCREEN		JACKET	
	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$	MATERIAL	$\emptyset$
50 $\pm$ 0.5	Cu	9	PE exp	23,6	Cu	24,9	PE	28
MHZ	30	450	894	960	1000	1500	2000	4000
dB/100m	0,65	2,74	4,04	4,2	4,3	5,45	6,46	9,94
Watts	14000	3320	2250	2160	2110	1660	1400	914